

Profi-Series



ROTO-MOULD CHASSIS
practically indestructible plastic housing


CONVENIENT INTEGRATED HOSE REEL (TST)
space-saving storage of the high-pressure hose with twist stop screw connection

ELECTRIC MOTOR - 1400 RPM, 4-POLE
slower motor RPMs last longer, run quieter and allow for better in-let suction capabilities

STAINLESS STEEL PRESSURE GAUGE
easy reading of the working pressure

ACCESSORY STORAGE
neat storage for high pressure gun and lances

OFF-ROAD CAPABILITY AND STABILITY
robust chassis for easy transport and high stability

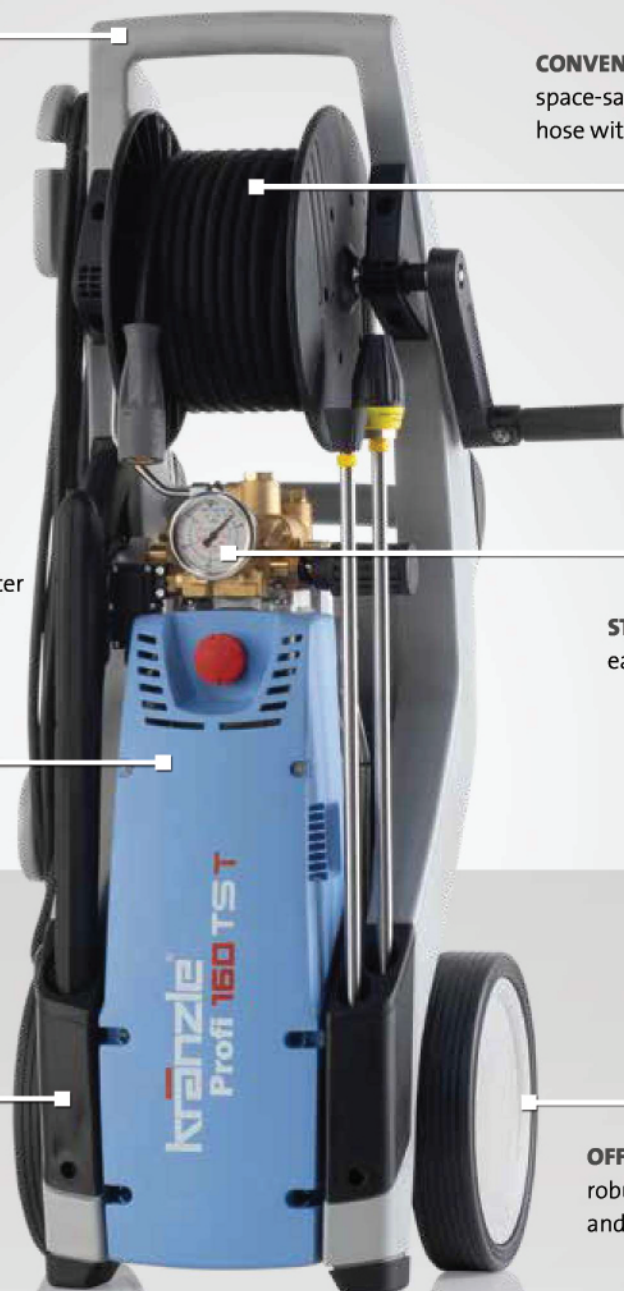

Profi 160 TST | 606000

► **ACCESSORIES** | page 28-29



EQUIPMENT

- Quick release plug-in system D12
- Kränzle axial pump
- Total-Stop system
- Stepless pressure regulation

- Optional: Internal Water Tank can be supplied upon request.
- Direct suction: Suction height 2.5 m
- High-pressure hose with Twist-Stop screw connection



VARIANT - NON-MARKING

NOM conversion kit Ord.no. **42260**

For further information on NON-Marking please refer to page 69


MODEL	Profi 160 TST	Profi 195 TST	Profi 175 TST
Ord.no. TST incl. hose drum	606000		

TECHNICAL SPECIFICATIONS

Operating pressure	bar MPa	30-130 3-13		
Water output	l/min l/h	11 660		
Admissible overpressure	bar MPa	160 16		
Motor speed	Rpm	1400		
Connection	V ~ Hz A	230 1 50 13		
Power intake Power output	kW	3.2 2.5		
Power supply cable	m	5		
Dimensions L x W x H	mm	355 375 980		
Weight	kg	45		

EQUIPMENT

High-pressure hose	m Ord.no.	15 (DN6) 43829		
Trigger gun with safety catch	Model Ord.no.	Starlet 4 12525		
Lance with flat-jet nozzle	Nozzle Ord.no.	● 045 12435-M20045		
Lance with Dirtkiller	Nozzle Ord.no.	● 045 12438-045		

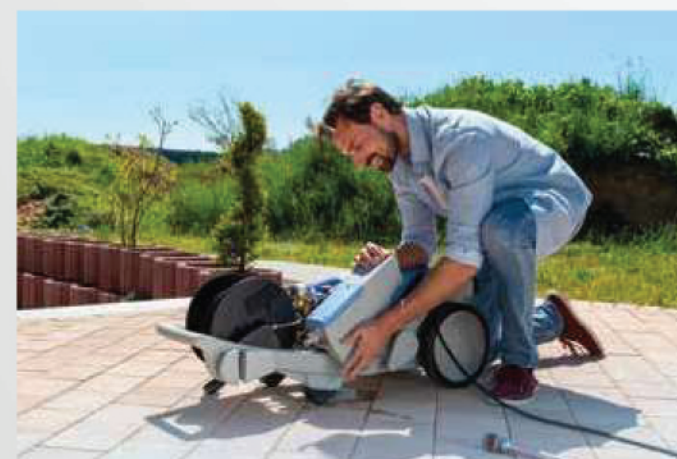

Water tank

EXPERT TIP

Prevents damage to the high-pressure pump in case of water shortage
 ■ Volume 1.3 liters
 ■ Simple, tool-free assembly

Ord.no. **43860**