



Assembling your new Kranzle K145T

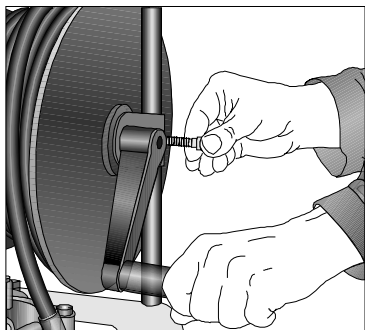

Put high pressure cleaner into upright position. Remove the screw from the brass element. Put the crank on the brass hexagon and fasten with the screw.

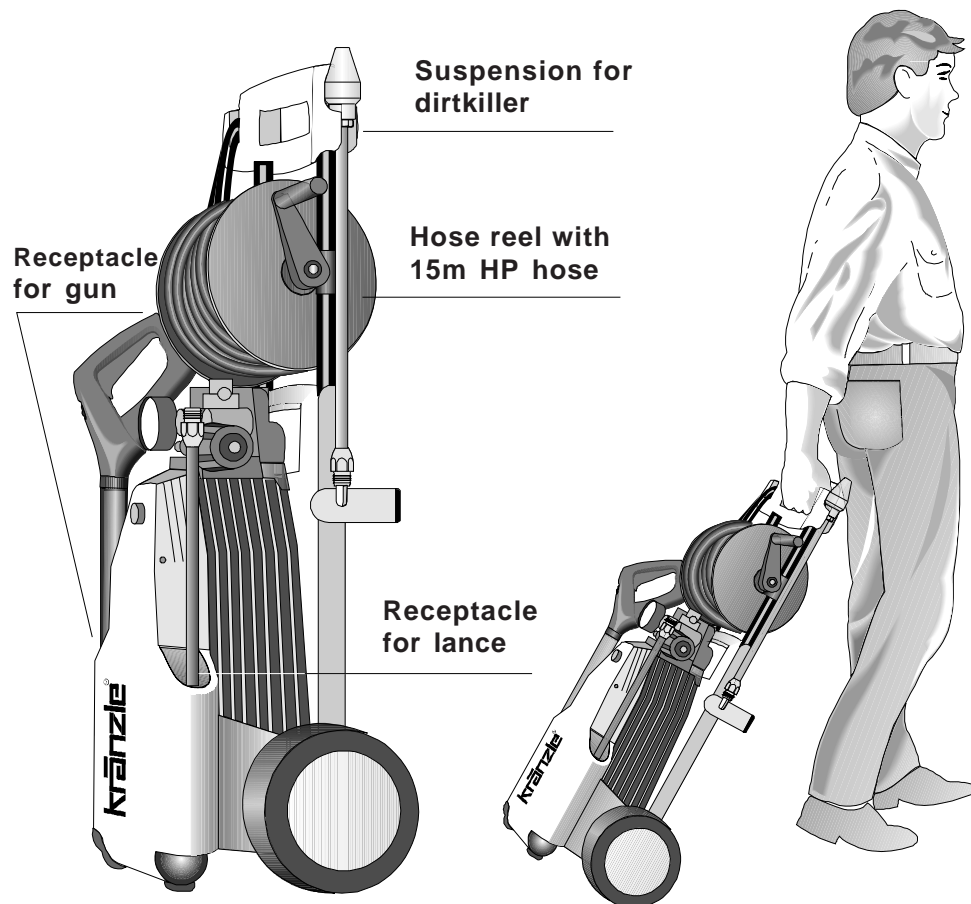


Preparation for use



1. Put high pressure cleaner into

Check oil level DO NOT OVER FILL !


**ONLY OPERATED
IN HORIZONTAL
POSITION !**

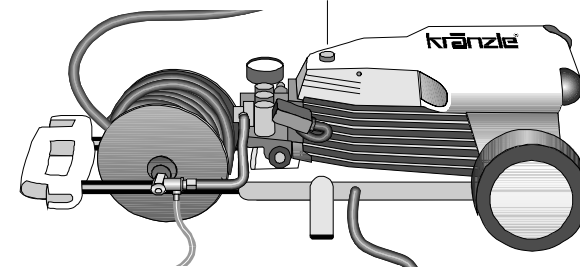

2. Connect the high pressure lance to the spray gun.

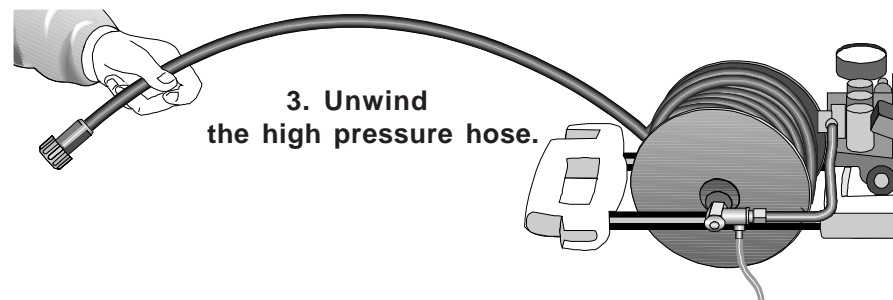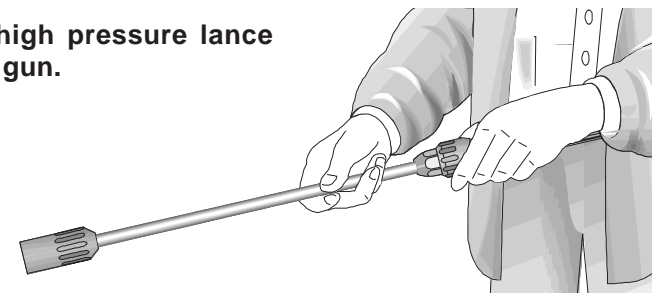


3. Unwind the high pressure hose.

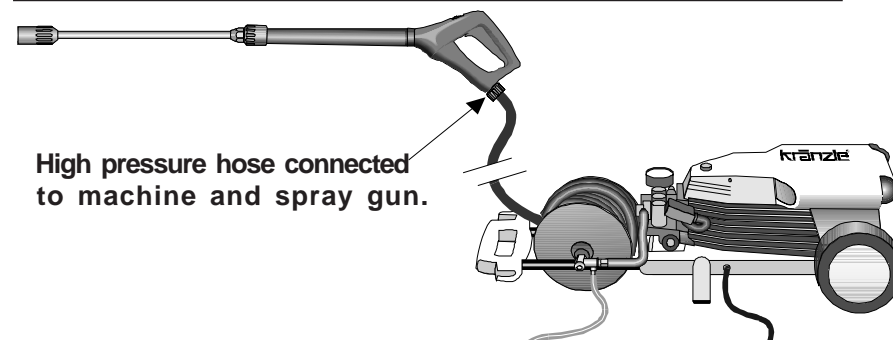

High pressure hose connected to machine and spray gun.

Preparation for use

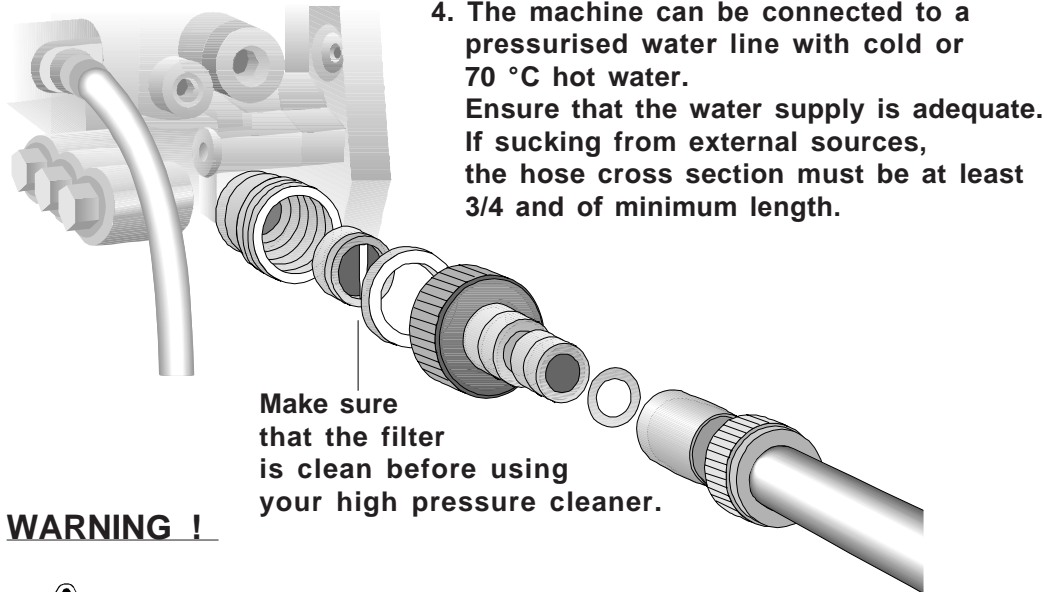


WARNING !



When running your high pressure cleaner with hot water of 60 °C or 70 °C


DO NOT TOUCH THE PUMP WITHOUT SAFETY GLOVES !

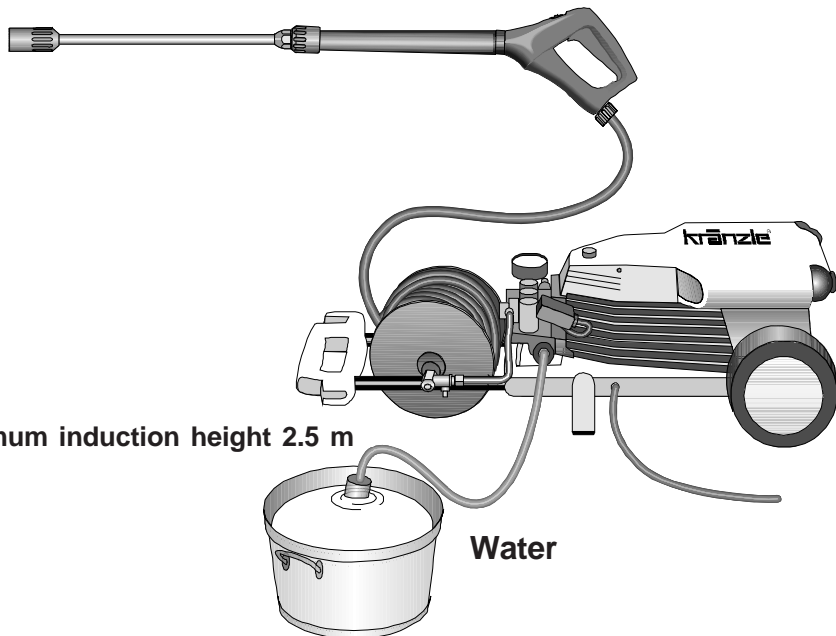

Preparation for use



Starting the machine

YOU MUST SQUEEZE THE TRIGGER GUN WHILE SWITCHING ON THE MACHINE.

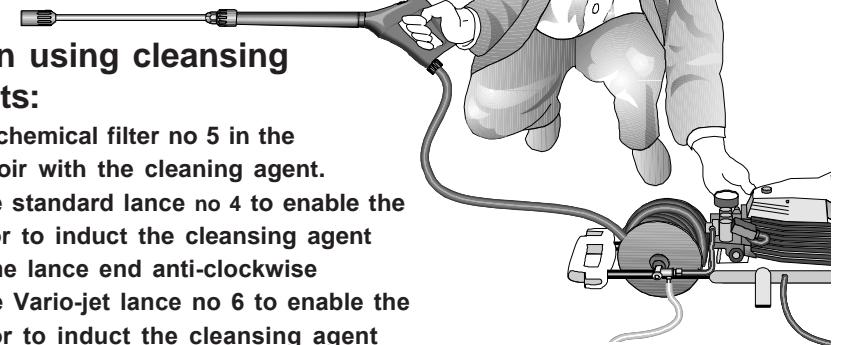

When using cleansing agents:

Place chemical filter no 5 in the reservoir with the cleaning agent. On the standard lance no 4 to enable the injector to induct the cleansing agent turn the lance end anti-clockwise. On the Vario-jet lance no 6 to enable the injector to induct the cleansing agent Push to the forward position

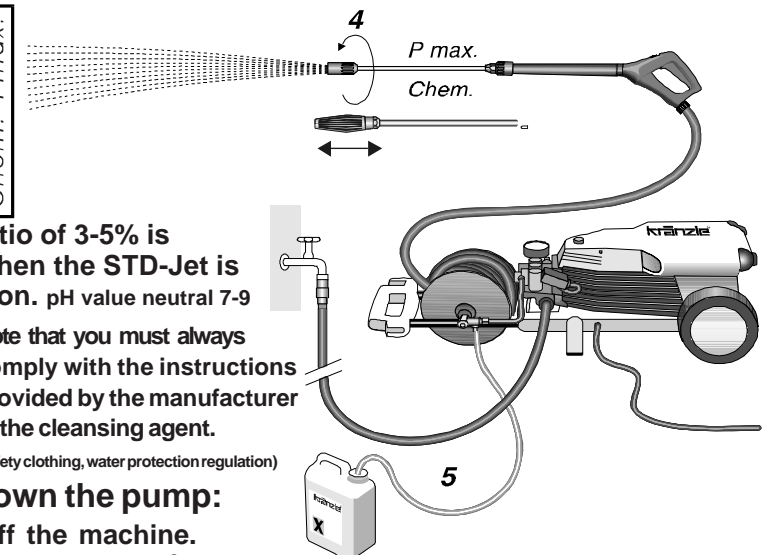

To shut down the pump:

1. Switch off the machine.
2. Cut off the water supply.
3. Open the spray gun briefly until the pressure is released.
4. Apply the safety catch on the spray gun.
5. Remove the water hose and spray gun.
6. Drain the pump: switch on the motor for approx 20 seconds.
7. Pull the plug from the socket.
8. Winter: store the pump in rooms above 0°C.
9. Clean the water filter.